
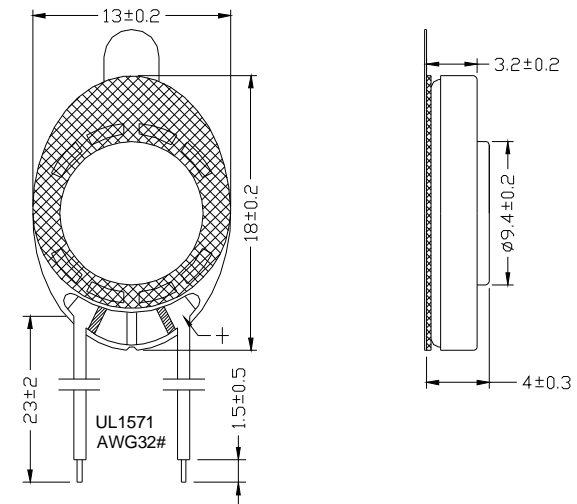


Mylar Speaker Specification

Our Part No		1318P02NH-33YF8-6E31	
Size	Diameter 13×18mm	Total Height	4.0 mm
No.	Item	Specification	Testing Condition
1.	Rated Imp	8ohm ± 15%	At 1 kHz 1.0V
2.	Resonance Freq	1000Hz ± 20%	Without Baffle
3.	Output S.P.L.	84 ± 3dB	At 0.5m 1W at 1.5K, 2K, 2.5K, 3KHz Average
4.	Input Power	Rated Power: 0.5W	Max Power: 1.0W
5.	Frequency Range	F0---20KHz	Output S.P.L.-10dB
6.	Operation	Must Be Normal	Program Source: 0.5W
7.	Buzzes & Rattles	Must Be Normal	Sin Wave 2.0V
8.	Load Test	After Test Meet 2&7	0.5W 48hours White Noise
9.	Distortion	5% Max	0.5W 1000Hz
10.	Heat Test	After Test 7&8&9	+70°C ± 2°C 48hours
11.	Cold Test	After Test 7&8&9	-30°C ± 2°C 48hours
12.	Humidity	After Test 7&8&9	40°C ± 2°C 90~95% R.H. 48hours
13.	Insulation Resistance	1MΩ	Dc100v FRA. And TER.
14.	Magnet	Φ6.5x1.0mm	N38
15.	Net Weight	1.6g/PC	
16.	Polarity	When a positive D.C voltage is applied to the terminal marked (+) or red, the diaphragm should move to the front.	

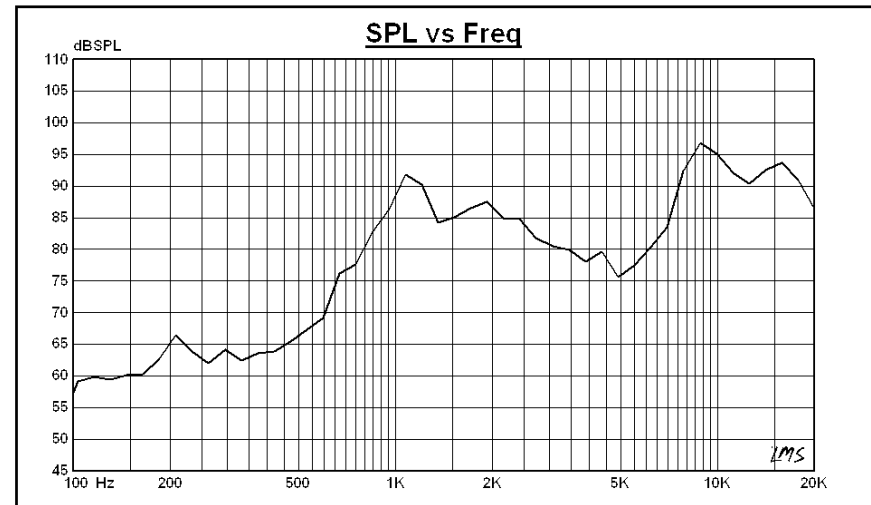

POWER SOUND ELECTRONICS LTD. - Acoustic Components Manufacturer

Tel: +86-755-8423 5076,8423 5093,8423 5316 Fax: +86-755-8423 5085 E-mail: psound@szonline.net

<http://www.chnpowersound.com>